Paguflex® Double Loop Couplings



The **Paguflex® double loop couplings** represents the natural evolution of the classic Paguag elastic couplings, known worldwide for their quality and robustness.

Made from high-performance technical polyurethane and with a coupling head in heavy-duty galvanised steel or anodised aluminium for high speeds, Paguflex® flexible couplings guarantee smooth, resistant and backlash-free torque transmission, even in conditions of misalignment or vibration.

Each component of the Paguflex® flexible coupling is tested and certified according to strict European standards to ensure consistent performance over time.

Ideal for industrial applications, automation, robotics and precision machinery, our couplings offer the perfect balance between flexibility, durability and reliability.

LAROSI Srl
Via Maroncelli 105B, 35129 Padova PD Italy
Tel. (+39) 049.772.533 - 049.772.192
www.larosi.it - contatti@larosi.it
www.larosi.eu - info@larosi.eu


CODE	D	A	L	d	h	head	M	d1/ d2	Material	color	thickness el. Elastic	weight gr.	Pieces per Pack	
PAGUFLEX07B	26	22	24	15	8	i	M3	**6**	Aluminium	Blue	1,5	8	**10**	*
PAGUFLEX07d8B	26	22	24	15	8	i	M3	**8**	Aluminium	Blue	1,5	7	**10**	
PAGUFLEX08B	26	22	30	15	8	E	M3	**6**	Aluminium	Blue	1,5	8	**10**	*
PAGUFLEX08d8B	26	22	30	15	8	E	M3	**8**	Aluminium	Blue	1,5	7	**10**	***
PAGUFLEX09B	31	28	28	18	9	i	M3	**6**	Aluminium	Blue	1,5	13	**10**	***
PAGUFLEX09d8B	31	28	28	18	9	i	M3	**8**	Aluminium	Blue	1,5	12	**10**	***
PAGUFLEX10	29	24	28	19	8	E	M3	**6**	Steel	Orange	1,5	29	1	
PAGUFLEX10d8	29	24	28	19	8	E	M3	**8**	Steel	Orange	1,5	27	1	*
PAGUFLEX10M4	29	24	28	19	9	E	M4	**6**	Steel	Yellow	2	33	1	***
PAGUFLEX10d8M4	29	24	28	19	9	E	M4	**8**	Steel	Yellow	2	31	1	***
PAGUFLEX10B	31	28	38	18	9	E	M4	**6**	Aluminium	Blue	1,6	13	**10**	*
PAGUFLEX10d8B	31	28	38	18	9	E	M4	**8**	Aluminium	Blue	1,6	12	**10**	*
PAGUFLEX10d8d6B	31	28	38	18	9	E	M4	**8**	Aluminium	Blue	1,6	12	**10**	***
PAGUFLEX20	48	43	49	26	12,5	i	M4	**10**	Steel	Yellow	3	84	1	
PAGUFLEX20d12	48	43	49	26	12,5	i	M4	**12**	Steel	Yellow	3	84	1	*
PAGUFLEX20B	45	40	45	25	13,5	i	M4	**10**	Aluminium	Blue	2,2	38	**10**	
PAGUFLEX20d12B	45	40	45	25	13,5	i	M4	**12**	Aluminium	Blue	2,2	36	**10**	*
PAGUFLEX30	54	48	54	28	15,5	i	M4	**12**	Steel	Orange	3	119	1	***
PAGUFLEX30d14	54	48	54	28	15,5	i	M4	**14**	Steel	Orange	3	115	1	***
PAGUFLEX30d10d16	54	48	54	28	15,5	i	M4	**10**	Steel	Orange	3	115	1	***
PAGUFLEX40	54	48	54	28	16	i	M5	**14**	Steel	Orange	4,5	108	1	***
PAGUFLEX40d10d16	54	48	54	28	16	i	M5	**14**	Steel	Orange	4,5	110	1	
PAGUFLEX40d12	54	48	54	28	16	i	M5	**14**	Steel	Orange	4,5	112	1	
PAGUFLEX40d12d14	54	48	54	28	16	i	M5	**14**	Steel	Orange	4,5	110	1	
PAGUFLEX40/4	55	49	59	28	16	i	M6	**14**	Steel	Orange	4,5	106	1	


*** Available upon request, assembly time 2 working weeks**

***** Available upon request from January 2025**


LAROSI Srl
Via Maroncelli 105B, 35129 Padova PD Italy
Tel. (+39) 049.772.533 - 049.772.192
www.larosi.it - contatti@larosi.it
www.larosi.eu - info@larosi.eu

Dimension Legend	
D	Angular rotation diameter
A	Lateral width
L	Length at rest
d	Metal attachment head diameter
h	Metal attachment head height
M	Fastening thread for side hole in the attachment head
d1	Attachment hole diameter
d2	Attachment hole diameter

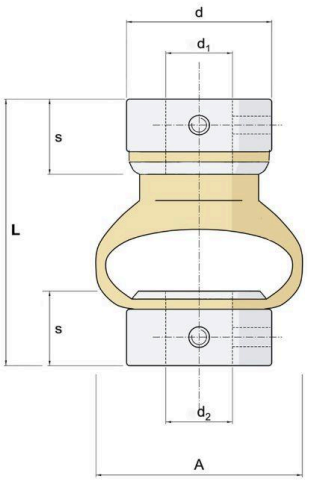


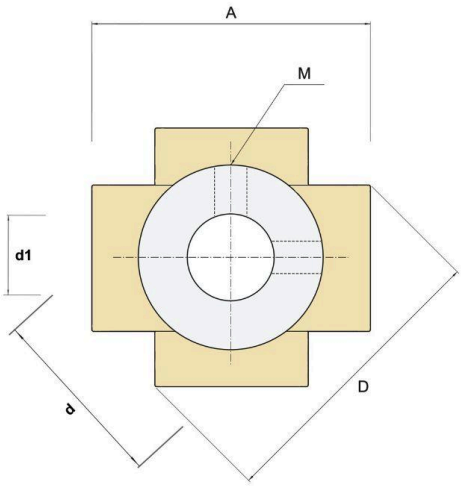

EXTERNAL HEAD
(type 08, 10)

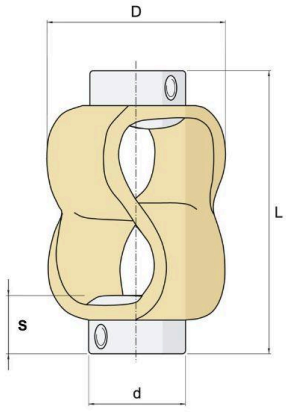

INTERNAL HEAD
(type 07, 20, 30, 40)

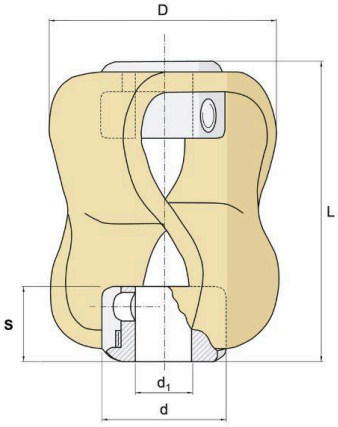

LAROSI Srl
Via Maroncelli 105B, 35129 Padova PD Italy
Tel. (+39) 049.772.533 - 049.772.192
www.larosi.it - contatti@larosi.it
www.larosi.eu - info@larosi.eu